

BESTOOL-KANON

中村製作所
日本製


針盤式扭力扳手 TOK-G




N300~N420TOK-G



N6~N200TOK-G

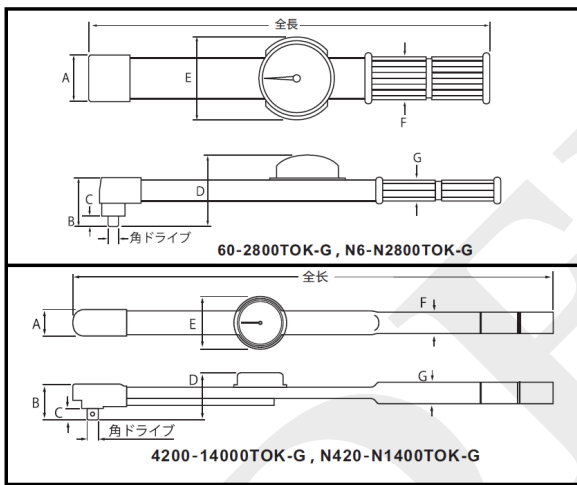

使用方法

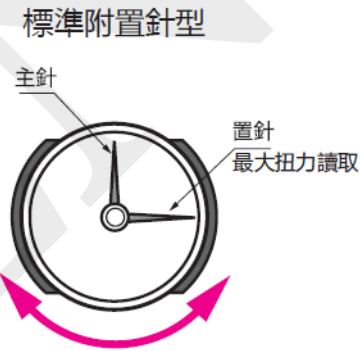

標準型號均附置針

型號	調整範圍	最小讀值	型號	調整範圍	最小讀值	四角頭	全長	尺寸(mm)						
公制	kgf.cm		牛頓	N.m			mm	A	B	C	D	E	F	G
60TOK-G	6-60	1	N6TOK-G	0.6-6	0.1	6.35	260	35	38.5	7.5	58	90	37	21.5
120TOK-G	10-120	2	N12TOK-G	1-12	0.2		(1/4")	260	35	38.5	7.5	58	90	37
300TOK-G	50-300	5	N30TOK-G	5-30	0.5	9.53 (3/8")	323	35	43	11	60	90	37	21.5
500TOK-G	50-500	5	N50TOK-G	5-50	0.5		323	35	43	11	60	90	37	21.5
700TOK-G	100-700	10	N70TOK-G	10-70	1		323	35	43	11	60	90	37	21.5
1400TOK-G	200-1400	20	N140TOK-G	20-140	2	12.7 (1/2")	463	39	49	14	65	90	41	22.5
2000TOK-G	200-2000	20	N200TOK-G	20-200	2		463	39	49	14	65	90	41	22.5
型號	調整範圍	最小讀值	型號	調整範圍	最小讀值	四角頭	全長	尺寸(mm)						
公制	kgf.m		牛頓	N.m			mm	A	B	C	D	E	F	G
3000TOK-G	3-30	0.5	N300TOK-G	30-300	5	19.05 (3/4")	682	41	55	20	77	90	Φ30	
4200TOK-G	4-42	1	N420TOK-G	40-420	10		955	48	60	20	77	90	Φ34	
5500TOK-G	5-55	1	N550TOK-G	50-550	10		1110	50	60	20	80	90	Φ38	Φ30
7000TOK-G	7-70	1	N700TOK-G	70-700	10	25.4 (1")	1280	54	64	20	85	90	Φ43	Φ32
8500TOK-G	10-85	1	N850TOK-G	100-850	10		1384	58	72	27	93	90	Φ45	Φ34
10000TOK-G	10-100	2	N1000TOK-G	100-1000	20		1484	66	74	27	94	90	Φ51	Φ40
14000TOK-G	20-140	2	N1400TOK-G	200-1400	20	1696	66	74	27	94	90	Φ51	Φ40	